


MONIER

Marselha MG Plus

A premium Marseille-profile clay tile designed for rehabilitation and heritage roofing.

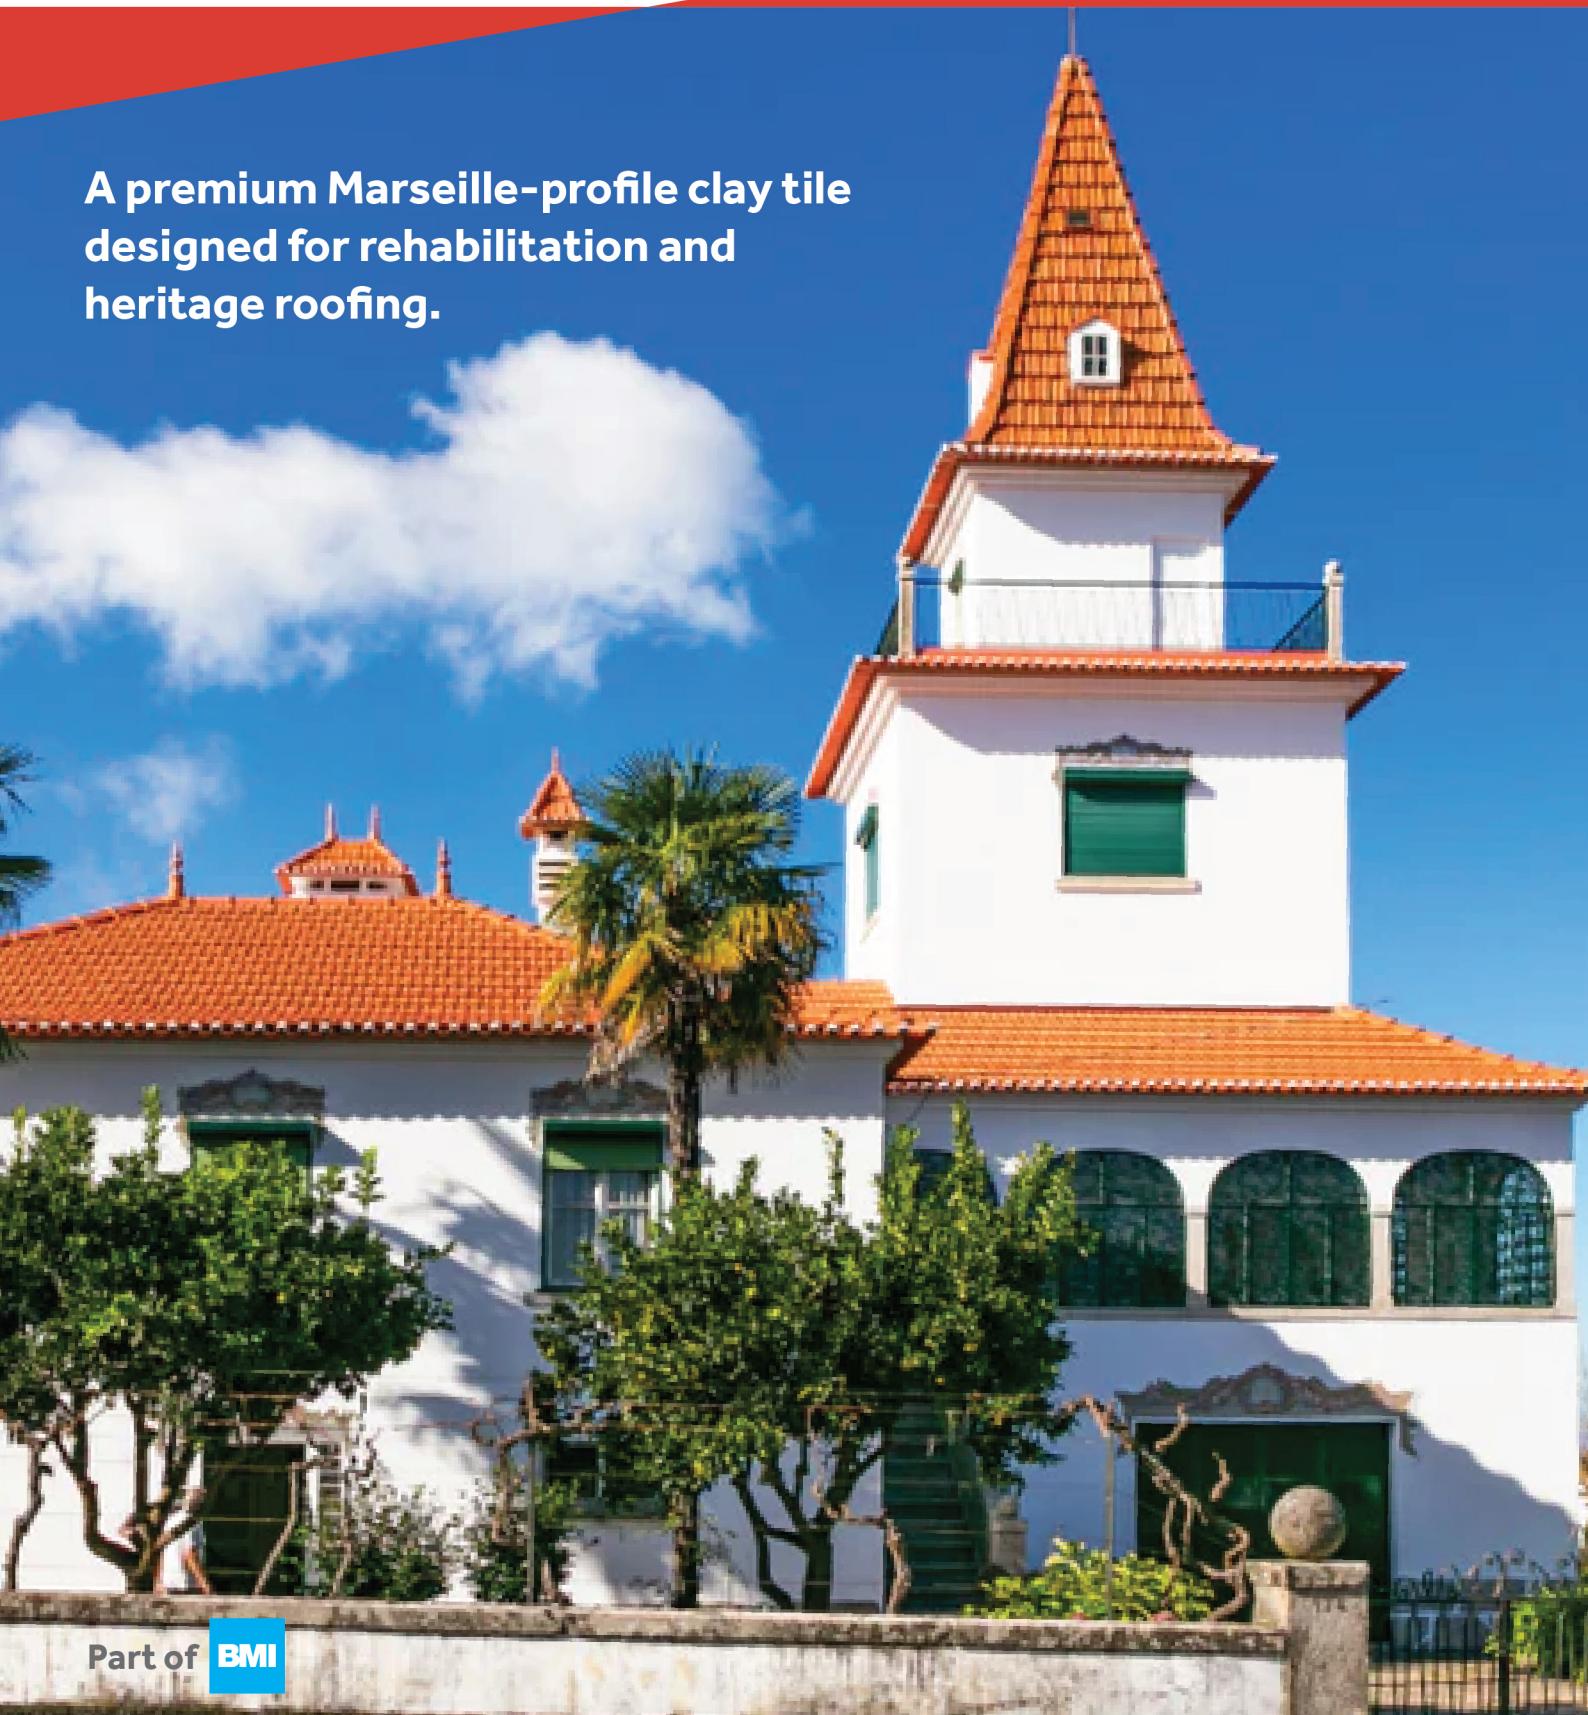


Part of **BMI**

Designed for Rehabilitation. Built for Durability.

Marselha MG Plus is a Marseille-profile clay tile developed for rehabilitation and heritage roofing applications. It combines strong mechanical performance, low water absorption, and stable dimensional quality to deliver reliable roofing performance with timeless architectural character.



Clay Tile



**CLASSIC MARSEILLE
PROFILE**



**NATURAL CLAY
MATERIALITY**



**DESIGNED FOR
REHABILITATION**



**TROPICAL
PERFORMANCE
READY**

PRODUCT & TECHNICAL DATA

Material	Clay
Dimensions A x B (mm)	264mm (W) x 460mm (L)
Tile Coverage	11.6 - 13.9 pcs/m ²
Unit Weight (Kg)	~3.6kg/pc
Fixing Screw	#8:4.2 mm dia (*Drill a pilot hole before fastening with a screw)
Installation Method	Cross Bond or Straight Bond
Manufacturing Site	Outeiro da Cabeça, Portugal

ROOF PITCH	LAYING PATTERN	UNDERLAY	BATTEN SPACING	Fixing Hole
≥12.5 deg.* (Excludes Coastal & Exposed Areas)	Cross Bond	Mandatory (in good sealed quality)	320 - 385mm c/c (Headlap 75 - 140mm)	Closed
≥15 deg.* (Excludes Coastal & Exposed Areas)	Cross / Straight Bond			Recommended (Mandatory for coastal & exposed areas)
≥20 deg.				

* The maximum rafter inclined length (total water run-off distance) is up to 6 meters at the minimum roof pitch stated. For rafter lengths exceeding this limit, please consult Monier for technical advice.

* The overall truss layout shall be set out equally and maintained consistently to ensure compliance with the recommended batten spacing specified in the installation requirements.

* For multi-tier roof configurations, a properly designed rainwater gutter system shall be provided between the upper and lower roof tiers to ensure effective drainage, provide controlled runoff, minimize splash, and protect the lower roof from potential leakage or damage caused by uncontrolled flow during heavy rainfall. We shall not be held liable for any water-related issues arising from the absence of a gutter system in a multi-tier roof design. Rainwater from downpipes, gutters, and valley gutters shall not be discharged onto the lower tiled roof to avoid excessive water concentration.

**Monier® Marselha MG Plus is essential to be installed with Monier's Complete Roof System Components. Refer to the sales representative for further information.

The roof supporting structure, including all rafters and trusses, shall be designed, specified, and certified by a Professional Engineer (P.E.) in accordance with applicable structural design codes and project requirements. For lightweight steel truss systems, the centre-to-centre (c/c) spacing of roof rafters or trusses shall not exceed 1.2 m.

In view of innovation, the specifications are subject to change without any prior notice and in the event of such changes, Monier shall ensure that the new specifications are equivalent if not better.



CALL US NOW

1800 88 0865

bmigroup.com/my



**MARSELHA MG PLUS
COLOUR PALETTE**

NATURAL



BMI ROOFING SYSTEMS SDN. BHD.

Registration No.197401002179 (19163-M)
(Formerly known as Monier Malaysia Sdn. Bhd.)
Suite 11.02, 11th Floor, Menara JKG,
No. 282, Jalan Raja Laut,
50350 Kuala Lumpur, Malaysia
T (+60) (3) 21760600
roofing-malaysia@bmigroup.com