

MONIER

EasyFlash[®] SE



Part of **BMI**

Monier EasyFlash® SE, Leak-Proof Solution for Wall Flashing

EASYFLASH® SE is a watertight dry fix solution specially designed to replace traditional metal flashing for wall abutment. It is stretchable coated aluminium up to 10% in roll direction ensures neat and all-weather sealing of junctions between walls and roof tiles. It has a full self-adhesive butyl backing allowing for self-fixing onto dust free surfaces, sealing off corners and joints with a standing seam technique.



WATER-TIGHT PERFORMANCE

- Creating weathertight wall connections
- Long-lasting water-tightness



AESTHETIC

- More enduring and tidy finishing
- Available in one colour, anthracite



FLEXIBILITY

- 10% Stretchable coated aluminium



DOES NOT SUFFER FROM WIND UPLIFT

- Fully butyl cover provides strong adhesion on the surface of the roof tiles and the wall, preventing wind uplift



EASY OF USE & FAST INSTALLATION


- Easy to apply to most surface and all types of wall connection, wall junctions, dormers, apron, chimney and fire walls
- No specific tool required easy to handle and install, at least 30% faster than conventional methods

PRODUCT & TECHNICAL DATA

Material	Aluminium Composite Honeycomb surface with self-adhesive high-tech butyl		
Width	280mm		
Length	5m per roll	Operating temperature range	Up to 80°C
Thickness	1.2mm (including release film)	Application temperature range	+5°C to 40°C
Colours	Anthracite	Storage condition	<30°C up to 2 years
Recommended Specifications	Monier EASYFLASH® SE is a dry fix solution for wall flashing in anthracite colour to be sealed with Monier Wakastrip Grey colour to be installed accordance with Monier's recommended installation method.		

In view of innovation, the specifications are subject to change without any prior notice and in the event of such changes, Monier shall ensure that the new specifications are equivalent if not better.

MONIER EASYFLASH® SE APPLICATION

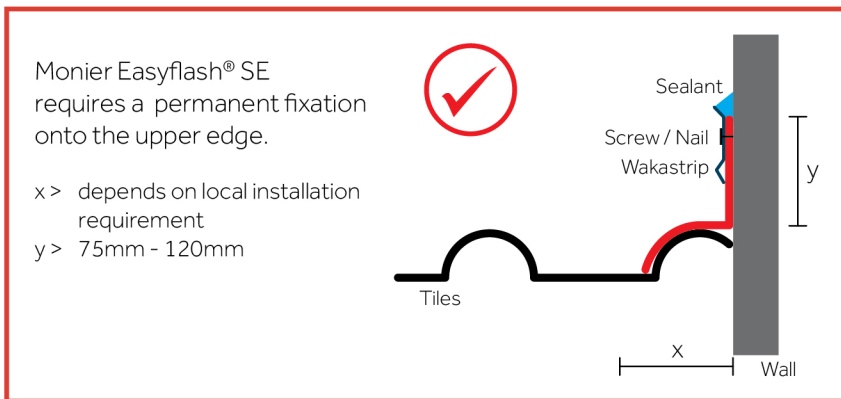


Designed specifically for wall and tile connection areas. Recommended for metal wall capping on fire walls where required.


WAKASTRIP

It is nailed / screwed onto the Easyflash® SE and the wall to provide additional sealing against water ingress. The top end is then sealed with a suitable weather resistant sealant.

Material	Clean colorbond steel
Colours	Red / Brown / Grey



F-400mm+400mm+400mm+
Length: 1,200mm

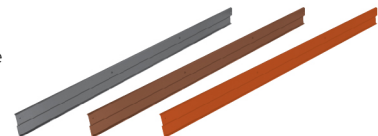

MONIER



CALL US NOW

1800 88 0865

bmigroup.com/my



BMI ROOFING SYSTEMS SDN. BHD. (BRSSB) reserved the right to change the contents of this document without any prior notice. Printed: 11/2025 © BRSSB
Edition 2025 / V1



Scan QR Code for BMI Malaysia



Scan QR Code for Showroom & Sales office location

BMI ROOFING SYSTEMS SDN. BHD.

Registration No.197401002179 (19163-M)
(Formerly known as Monier Malaysia Sdn. Bhd.)
Suite 11.02, 11th Floor, Menara JKG,
No. 282, Jalan Raja Laut,
50350 Kuala Lumpur, Malaysia
T (+60) (3) 21760600
roofing-malaysia@bmigroup.com

ABOUT BMI GROUP

BMI Group was born out of a recognition that customers now expect a single point of expertise to help them find their ideal roof. Bringing together some of the industries most trusted brands to become the largest supplier of both flat and pitched roofing and waterproofing solutions throughout Europe, BMI Group has over 173 years of experience and innovation to offer its clients.

As a **Standard Industries** company, BMI Group, headquartered in London, has the support, reach and resources of a global enterprise. With over 120 production facilities across Europe, Africa and Asia, and more than 9,500 employees worldwide, the business is well positioned to provide an unparalleled level of service to homeowners, specifiers, contractors, property owners and developers.

Find out more at www.bmigroup.com

