

MONIER

S-Pantile



Part of **BMI**

Monier S-Pantile, It Starts with a Solid Roof

S-Pantile

S-Pantile, a unique wavy 'S' profile with clean, crisp lines yielding bold European architecture.

Clay roof tiles are renowned for the incredible durability and beauty, which is why they remain as the core element of Monier since inception.

Mined, moulded & fired at source, Monier Clay Roof Tiles are made 100% from the finest clay through a state-of-the-art HydroCeric and H-Cassette system.

Monier Clay Roof Tiles are exceptionally strong, have a high level of colour retention and require minimal maintenance.



**INTERLOCKING
ROOFING
SYSTEM**



**COLOUR
FASTNESS**



**ACCURATE
& PRECISE**



**TIMELESS &
ENDURING**



**STRONG &
DURABLE**





**CLASSIC
CONTEMPORARY**

S-PANTILE COLOUR PALETTE


S-Pantile, a unique wavy 'S' profile with clean, crisp lines yielding bold European architecture.

CLASSIC COLLECTION

Glazed

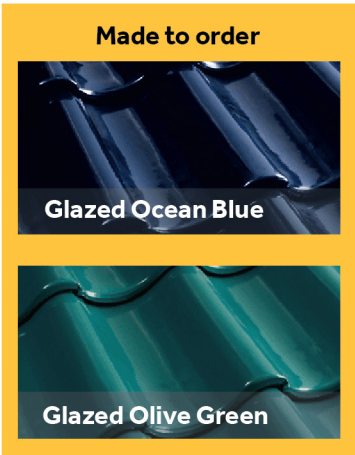


Satin




MODERN COLLECTION

Natural



Earthy



- The colours shown here are reproduced as close to the original as printing technology allows. For best accuracy on colour selection, refer to actual tile.
- Other colours not featured on this page are available upon request.

PRODUCT & TECHNICAL DATA	
Dimension	280mm (W) x 420mm (L)
Batten Spacing*	345mm c/c as standard spacing (+/- 3mm for occasional installation variance)
Coverage	12.5pcs/m ²
Weight	~3.85kg/pc
Minimum Pitch	20°

* The maximum rafter inclined length (total water run-off distance) is up to 6 meters at the minimum roof pitch stated. For rafter lengths exceeding this limit, please consult Monier for technical advice.

* The overall truss layout shall be set out equally and maintained consistently to ensure compliance with the recommended batten spacing specified in the installation requirements.

* For multi-tier roof configurations, a properly designed rainwater gutter system shall be



provided between the upper and lower roof tiers to ensure effective drainage, provide controlled runoff, minimize splash, and protect the lower roof from potential leakage or damage caused by uncontrolled flow during heavy rainfall. Rainwater from downpipes shall not be discharged onto the lower tiled roof to avoid excessive water concentration. We shall not be held liable for any water-related issues arising from the absence of a gutter system in a multi-tier roof design.

In view of innovation, the specifications are subject to change without any prior notice and in the event of such changes, Monier shall ensure that the new specifications are equivalent if not better.

ROOF SYSTEM COMPONENTS



RADIANT BARRIERS

Woven Series

Radenshield® AL+ FX (1.25m x 48m)

A double sided woven fire retardant aluminium foil.

Radenshield® AL FX (1.25m x 48m)

A single sided woven fire retardant aluminium foil.

Bubble R Series

ThermalFoil™ Deluxe Bubble R (1.22m x 20m)

A double sided pure aluminium foil with 6mm thermal insulating polymer with double sided 20mm Super Bubble.

Bubble Series

ThermalFoil™ BF (1.22m x 40m)

A double sided small bubble fire retardant aluminium foil.


ThermalFoil™ Deluxe BF (1.22m x 20m)

A double sided big bubble fire retardant aluminium foil.

ThermalFoil™ Super BW (1.22m x 40m)

A double sided big bubble fire retardant aluminium foil with single sided woven.

HIP & RIDGE DRY FIX SOLUTION

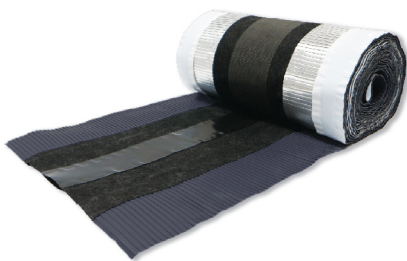

CompactRoll® Plus

Overall Dimensions:
340mm x 10m

Colours Available:



Anthracite Brown Red

ABUTMENT & WALL FLASHING



EasyFlash® Plus

Overall Dimensions:
250mm x 5m
280mm x 5m

Colours Available:




Anthracite Brown Red

OTHERS COMPONENTS

Wakastrap

Overall Dimensions:
65mm x 1.22m



Pest Guard

Overall Dimensions:
1m x 70mm x 2mm




Ridge Tree


S-PANTILE FITTINGS SERIES




S-Pantile Tile

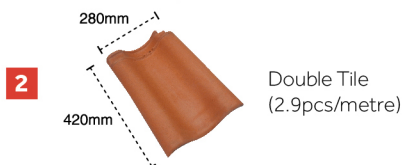


Double Tile
(2.9pcs/metre)



Left Verge Tile
(2.9pcs/metre)



Right Verge Tile
(2.9pcs/metre)




Ridge / Hip Tile
(2.8pcs/metre)




Ridge Connecting
Standard Tile
(4.3pcs/metre)




Ridge Connecting
Double Tile

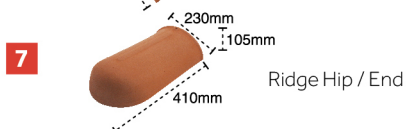


Ridge Hip / End



Ridge End
Cap



Elbow

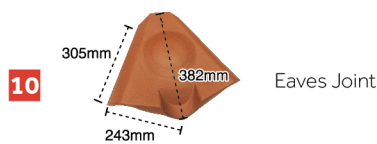


Eaves Joint




Eaves
Standard Tile
(4.3pcs/metre)




Eaves
Double Tile

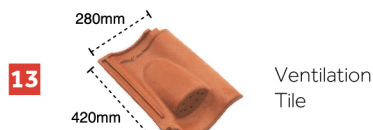


Ventilation
Tile

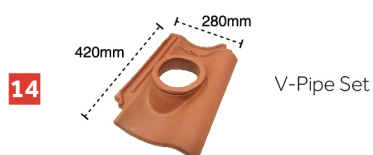

V-Pipe Set




3-Way Apex

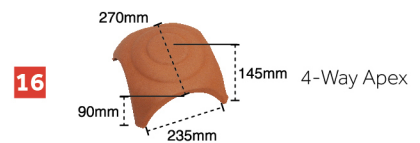


4-Way Apex




Universal Capping

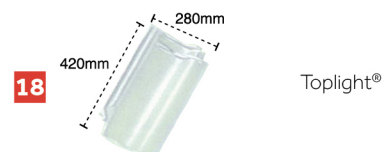

Toplight®

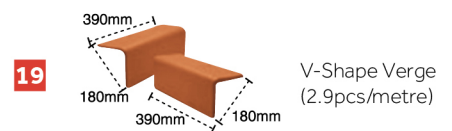

V-Shape Verge
(2.9pcs/metre)

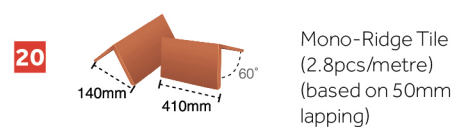

Mono-Ridge Tile
(2.8pcs/metre)
(based on 50mm
lapping)

MONIER



CALL US NOW

1800 88 0865

bmigroup.com/my



BMI ROOFING SYSTEMS SDN. BHD. (BRSSB) reserved the right to change the contents of this document without any prior notice. Printed: 11/2025 © BRSSB
Edition 2025 / V1



Scan QR Code for
BMI Malaysia



Scan QR Code for
Showroom & Sales
office location

BMI ROOFING SYSTEMS SDN. BHD.

Registration No.197401002179 (19163-M)
(Formerly known as Monier Malaysia Sdn. Bhd.)
Suite 11.02, 11th Floor, Menara JKG,
No. 282, Jalan Raja Laut,
50350 Kuala Lumpur, Malaysia
T (+60) (3) 21760600
roofing-malaysia@bmigroup.com

ABOUT BMI GROUP

BMI Group was born out of a recognition that customers now expect a single point of expertise to help them find their ideal roof. Bringing together some of the industries most trusted brands to become the largest supplier of both flat and pitched roofing and waterproofing solutions throughout Europe, BMI Group has over 173 years of experience and innovation to offer its clients.

As a **Standard Industries** company, BMI Group, headquartered in London, has the support, reach and resources of a global enterprise. With over 120 production facilities across Europe, Africa and Asia, and more than 9,500 employees worldwide, the business is well positioned to provide an unparalleled level of service to homeowners, specifiers, contractors, property owners and developers.

Find out more at www.bmigroup.com

