
MONIER





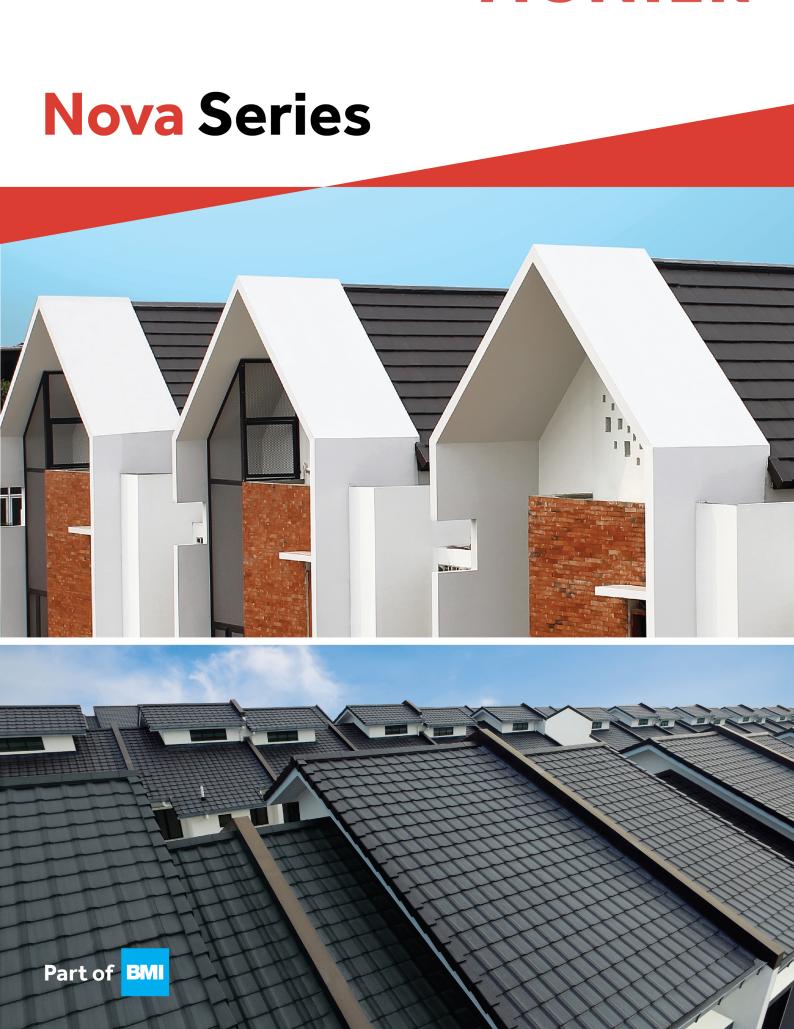

The colours shown here are reproduced as close to the original as printing technology allows. For best accuracy on colour selection, refer to actual tile. Monier recommends the use of underlay in all flat tiles.

The BMI Nova Series roof tile retains its modern minimalist design and distinct features, now featuring a modest and durable surface suitable for our tropical climate.



• Subtle, slightly rough textures that enhance without overpowering.



• Designed to withstand tropical climates, ensuring enduring appeal.



• A testament to innovation, quality, and our commitment to excellence.

Monier® Legacy® Nova, Modern Flat Roof & Minimalist Design

PRODUCT & TECHNICAL DATA

330mm (W) x 420mm (L) Dimension

Batten Spacing* 310mm - 330mm

*Batten Spacing has to be calculated based on actual rafter length. The maximum rafter length span up to 6 meters at minimum roof pitch stated. For rafter lengths greater than this, please contact Monier.

Minimum Headlap	90mm	90mm - 110mm			
Coverage	10.1 - 1	10.1 - 10.8pcs/m²			
Weight	5.40 kg	5.40 kg (+0.0, -0.40)			
Laying Pattern	Strictly	Strictly Cross / Broken Bond			
Pitch**	≥20°	≥25°	≥30°		
Max. Rafter Length	4.5m	6.0m	9.0m		

view of innovation, the specifications are subject to change without any prior notice and in the event of such changes Monier shall ensure that the new specifications are equivalent if not better.



Nova Black

ANGULAR FITTINGS & ROOF SOLUTIONS SERIES

LEGACY® NOVA is offered as a closed system with a wide range of fittings and components.

MONIER® ANGULAR FITTINGS SERIES



Angular Ridge (Coverage 2.90 pcs/m)



Angular Hip (Coverage 2.90 pcs/m)



Angular Ridge Fnd



Angular Hip Fnd



3-Way Apex



Universal Angular Verge Tile (Coverage: 3.10 pcs/m)



Angular Verge End



Monoridge Tile (Coverage: 3.30 pcs/m)



Monoridae End Tile

MONIER® ROOF SOLUTION

CoolRoof™ SolarRoof[™] Leak-Proof™ Safe-Roof™



























Plus for Ridge & Hip Ventilation

Compactroll® Radenshield® Pest Guard™ Solar Water

(Underlay) for Ventilation at the Eaves

Heating System

Toplight®

Plus for Ridge & Hip Ventilation

V-Pipe Set

EasyFlash®Plus Solar Fitting (Wall Flashing Dry Fix)

Wakastrip

Pest Guard™ for Ventilation at the Eaves

Fixings for Secure (Nails/Screw/ Fixing at Clips) Valleys & Hips

^{**}Legacy Roof System is essential to be installed with Monier's Complete Roof System Components Refer to the sales representative for further information.

Monier® Perspective® Nova, **Sleek Lines with Geometric Design & Durable Coating**

PRODUCT & TECHNICAL DATA

Dimension	330mm (W)	330mm (W) x 420mm (L)				
Batten Spacing*	up to	up to	up to	up to		
	295mm	320mm	330mm	345mm		

*Batten Spacing has to be calculated based on actual rafter length. The maximum rafter length span up to 6 meters at minimum roof pitch stated. For rafter lengths greater than this, please contact BMI.

Minimum	Headlap	125mm	.25mm 100mm 9		75mm	
Coverage	•	11.3pcs/m² 10.4pcs/m² 10.1pcs/m² 9		9.7pcs/m²		
Weight	Weight/piece	4.5 kg (+0.0, -0.30)				
	Weight/m²	50.8 kg/m²	46.8 kg/m²	45.4 kg/m²	43.7 kg/m²	
		(+0.0,-3.34kg/m²)	(+0.0, -3.12kg/m²)	(+0.0, -2.98kg/m²)	(+0.0, -2.96kg/m²)	
Minimum	Pitch	≥15°	≥17.5°	≥20°	≥25°	

In view of innovation, the specifications are subject to change without any prior notice and in the event of such changes Monier shall ensure that the new specifications are equivalent if not better



Opal Black

*With proper overlapping, MONIER® PERSPECTIVE® NOVA design can cope with ultra modern 15° pitch roofs.

ANGULAR FITTINGS & ROOF SOLUTIONS SERIES

PERSPECTIVE® NOVA is offered as a closed system with a wide range of fittings and components.

MONIER® ANGULAR FITTINGS SERIES



Angular Ridge (Coverage: 2.90 pcs/m)



Angular Hip (Coverage: 2.90 pcs/m)



Angular Ridge End



Angular Hip Fnd



3-Way Apex



Universal Angular Verge Tile (Coverage: 3.10 pcs/m)



Universal Angular Verge End



Monoridge Tile (Coverage: 3.30 pcs/m)



Monoridge End Tile

MONIER® ROOF SOLUTION CoolRoof™ SolarRoof™ Leak-Proof™ Safe-Roof™





Radenshield®



Solar Water



Toplight®













& Hip Ventilation

Pest Guard™ (Underlay) for Ventilation at the Faves

Heating System

Compactroll® Plus for Ridge & Hip Ventilation

V-Pipe Set

EasyFlash®Plus Solar Fitting (Wall Flashing Dry Fix)

Kit


Wakastrip

Pest Guard™ for Ventilation for Secure (Nails/Screw/ at the Faves

Cut Tile Clip Fixing at Vallevs & Hips

Fixings Clips)

Components and fittings make tiles become a roof

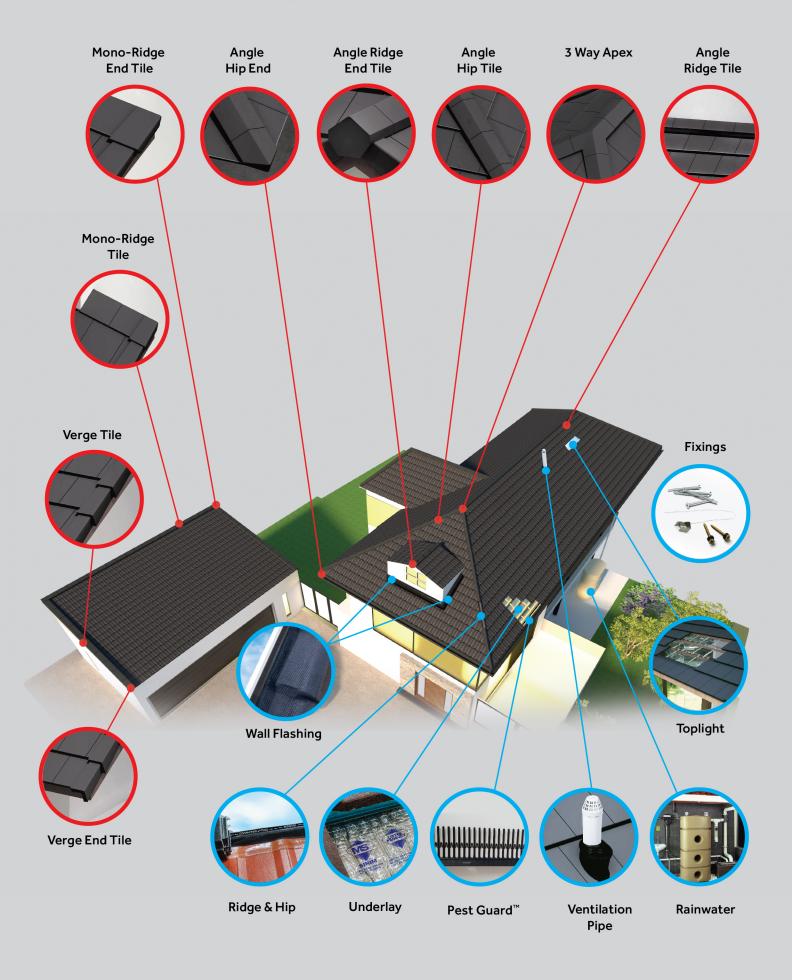

MONIER





BMI ROOFING SYSTEMS SDN. BHD. (BRSSB) reserved the right to change the contents of this document without any prior notice. Printed: 04/2024 @BRSSB

office location









BMI ROOFING SYSTEMS SDN. BHD.

Registration No.197401002179 (19163-M) (Formerly known as Monier Malaysia Sdn. Bhd.) Suite 11.02, 11th Floor, Menara JKG, No. 282, Jalan Raja Laut, 50350 Kuala Lumpur, Malaysia T (+60) (3) 21760600 Toll Free: 1800 88 0865 roofing-malaysia@bmigroup.com

bmigroup.com/my









ABOUT BMI GROUP

BMI Group was born out of a recognition that customers now expect a single point of expertise to help them find their ideal roof. Bringing together some of the industries most trusted brands to become the largest supplier of both flat and pitched roofing and waterproofing solutions throughout Europe, BMI Group has over 165 years of experience and innovation to offer its clients.

As a **Standard Industries** company, BMI Group, headquartered in London, has the support, reach and resources of a global enterprise. With over 120 production facilities across Europe, Africa and Asia, and more than 9,500 employees worldwide, the business is well positioned to provide an unparalleled level of service to homeowners, specifiers, contractors, property owners and developers.

Find out more at www.bmigroup.com